



Venturi Nozzles

Whihin a reverse jet pulse fabric filter, the cleaning function and the life of bags or cartridges are critically dependent on the control of the cleaning air into the individual bags or cartridges. Nozzles have been specially designed to deliver the required amount of air into each and every bag or cartridge. The unique method by which the nozzle is attached to the blowtube facilitates accurate installation, and ease of commissioning of filters where dust characteristics are unpredictable.




Cartridge Cleaners

The cleaning of cartridge of cartridges has presented many filter owners with significant problems. Solution is a unique (patent applied for), nozzle that ensures optimum distribution of the cleaning pulse down the walls of the filter cartridge. This unit dispenses with the need for venturis, and is field adaptable to most cartridge filters.



Coalescing Filters / Auto Drains

For most filter operations, air used for reverse jet pulse cleaning should itself be clean and dry. While the best solution involves the use of refrigerated air dryers, in some cases, the use of coalescing filters, backed up by auto drains on the header, may suffice.

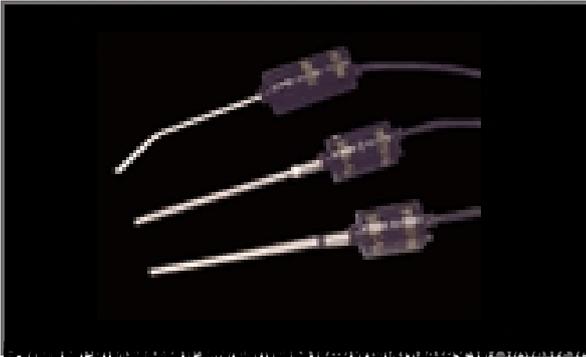

Equipment used for measuring pressure, flow, temperature, and other parameters in industrial processes.




Substrate Connectors provide the interface between the sensor and the process, facilitating



Equipment used for measuring pressure, flow, temperature, and other parameters in industrial processes.



Multiple groups of sensors are used to monitor different parameters in a process, providing

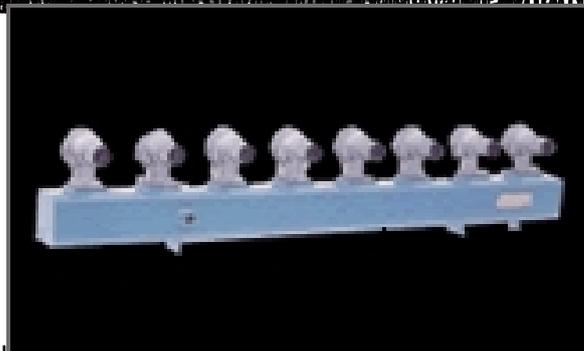

Main body of the sensor is associated with pressure systems, performs real-time data processing



PRODUCT IMAGE

Damper



PRODUCT IMAGE

Slide Gate



PRODUCT IMAGE

Rotary



PRODUCT IMAGE

Butter Fly



PRODUCT IMAGE

Vibrator & Air Kicker

